

greenworks

pro

EN

SNOW THROWER

OPERATOR MANUAL

FR


SOUFFLEUSE À NEIGE

MANUEL D'OPÉRATEUR

ES

EQUIPO QUITANIEVE

MANUAL DEL OPERADOR

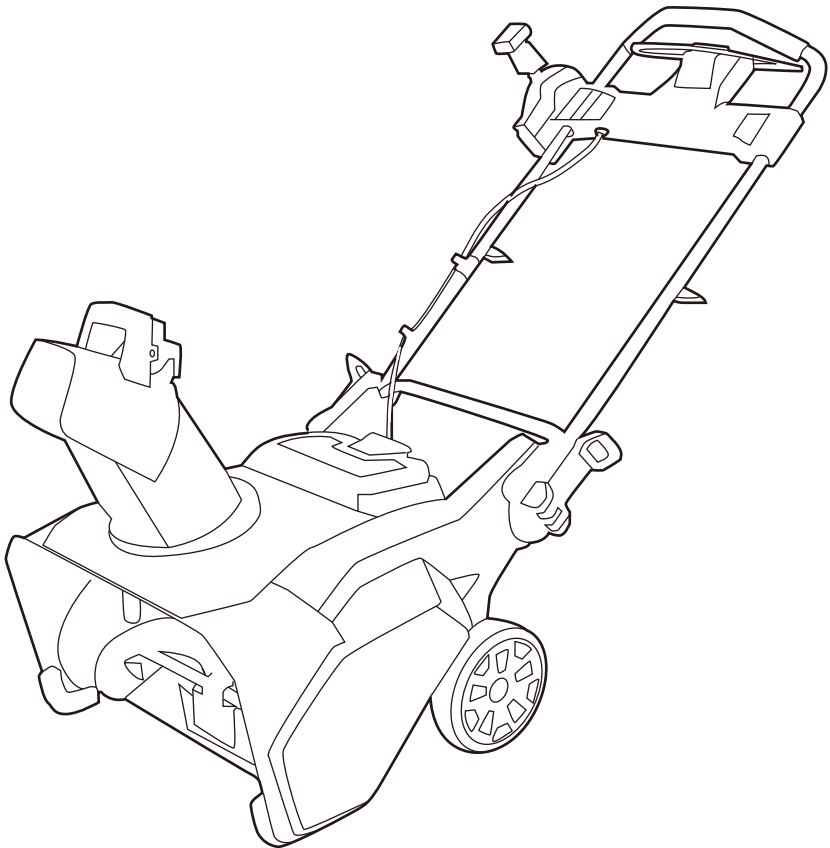

SNC409

www.greenworkstools.com


1	Description.....	2	7.6	Install the battery pack.....	7
1.1	Purpose.....	2	7.7	Remove the battery pack.....	7
1.2	Overview.....	2			
1.3	Packing list.....	2			
2	General appliance		8	Operation.....	7
	safety warnings.....	2	8.1	Cold weather operation.....	7
2.1	Training.....	2	8.2	Blue LED light.....	7
2.2	Preparation.....	2	8.3	Start the machine.....	7
2.3	Operation.....	3	8.4	Stop the machine.....	8
2.4	Maintenance.....	3	8.5	LED light.....	8
2.5	Recommended ambient temperature range:.....	4	8.6	Speed switch.....	8
3	Symbols on the product.....	4	8.7	Adjust the discharge chute.....	8
4	Risk levels.....	4	8.8	Adjust the chute deflector.....	8
5	Environmentally safe		8.9	Operation tips.....	9
	battery disposal.....	5	9	Maintenance.....	9
6	Proposition 65.....	5	9.1	General maintenance.....	9
7	Installation.....	5	9.2	Replace the scraper.....	9
7.1	Unpack the machine.....	5	9.3	Replace the belt.....	10
7.2	Unfold the middle handle.....	6	9.4	Replace the impeller.....	10
7.3	Install the upper handle.....	6	9.5	Replace the skid plates.....	10
7.4	Install the chute-rotation box.....	6	9.6	Store the machine.....	10
7.5	Install the chute deflector.....	6	10	Troubleshooting.....	11
			11	Technical data.....	11
			12	Limited warranty.....	11
			13	Exploded view.....	13

1 DESCRIPTION

1.1 PURPOSE

This machine is used to remove and clear away snow from sidewalks, driveways and other paved ground-level surfaces.

1.2 OVERVIEW



- | | |
|----|-----------------------|
| 1 | Bail lever |
| 2 | Upper handle |
| 3 | Middle handle |
| 4 | Lower handle |
| 5 | Wheel |
| 6 | Battery door |
| 7 | Scraper |
| 8 | Impeller |
| 9 | Discharge chute |
| 10 | Chute deflector |
| 11 | Chute-rotation handle |

1.3 PACKING LIST

- | | | | |
|---|------------------------------|---|------------------------|
| 1 | Snow thrower bare tool | 5 | Upper handle assembly |
| 2 | Chute deflector assembly | 6 | Middle handle assembly |
| 3 | Quick-release lever assembly | 7 | Manual |
| 4 | Chute-rotation box assembly | 8 | 2 spare screws |

2 GENERAL APPLIANCE SAFETY WARNINGS



WARNING

Read all safety warnings and all instructions.
Failure to follow the warnings and instructions may result in electric shock, fire and/or serious injury.

Save all warnings and instructions for future reference.

The term "appliance" in the warnings refers to your battery-operated (cordless) snow thrower.

2.1 TRAINING

- Do not allow children under the age of 14 to operate this tool. Children who are 14 years of age or older must read and understand the operating instructions and safety rules in this manual and must be trained and supervised by a parent.
- Read the operating and service instruction manual carefully. Be thoroughly familiar with the controls and the proper use of the appliance. Know how to stop the unit and disengage the controls quickly.
- Never allow children to operate the appliance. Never allow adults to operate the appliance without proper instruction.
- Keep the area of operation clear of all persons, particularly small children, and pets.
- Exercise caution to avoid slipping or falling, especially when operating in reverse.
- Do not use on graveled surfaces.
- Dress Properly – Do not wear loose clothing or jewelry. They can be caught in moving parts.
- Wear rubber boots when operating the appliance.
- Operation of the appliance in the hand-held position is unsafe, except in accordance with the special instructions for such use provided in the operator's manual.

2.2 PREPARATION

- Thoroughly inspect the area where the appliance is to be used and remove all doormats, sleds, boards, wires, and other foreign objects.
- Do not operate the appliance without wearing adequate winter garments. Wear footwear, which will improve footing on slippery surfaces.
- Adjust the housing height to clear gravel or crushed rock surface.
- Never attempt to make any adjustments while the appliance is running (except where specifically recommended by manufacturer).
- Always wear safety glasses or eye shields during operation or while performing an adjustment or repair to protect eyes from foreign objects that may be thrown from the appliance.
- Prevent unintentional starting. Ensure the switch is in the off-position before connecting to battery pack, picking up or carrying the appliance. Carrying the appliance with your finger on the switch or energizing appliance that have the switch on invites accidents.
- Disconnect the battery pack from the appliance before making any adjustments, changing accessories, or storing appliance. Such preventive safety measures reduce the risk of starting the appliance accidentally.

- When battery pack is not in use, keep it away from other metal objects, like paper clips, coins, keys, nails, screw or other small metal objects, that can make a connection from one terminal to another. Shorting the battery terminals together may cause burns or a fire.
- Under abusive conditions, liquid may be ejected from the battery; avoid contact. If contact accidentally occurs, flush with water. If liquid contacts eyes, additionally seek medical help. Liquid ejected from the battery may cause irritation or burns.

2.3 OPERATION

- Do not put hands or feet near or under rotating parts. Keep clear of the discharge opening at all times.
- Exercise extreme caution when operating on or crossing gravel drives, walks, or roads. Stay alert for hidden hazards or traffic.
- After striking a foreign object, turn the machine off and remove the battery pack, and then inspect it for damage. Repair any damage before restarting and using the machine.
- If the appliance should start to vibrate abnormally, stop the machine and check immediately for the cause. Vibration is generally a warning of trouble.
- Stop the machine whenever you leave the operating position, before unclogging the collector/impeller housing or discharge guide, and when making any repairs, adjustments, or inspections.
- When cleaning, repairing, or inspecting, make certain the collector/impeller and all moving parts have stopped.
- Exercise extreme caution when operating on slopes.
- Never operate the appliance without proper guards, keep other safety protective devices in place and working.
- Never direct the discharge toward people or areas where property damage can occur. Keep children and others away.
- Don't Overreach – Keep proper footing and balance at all times.
- Do not overload the machine capacity by attempting to clear snow at too fast a rate.
- Don't Force appliance – It will perform better and safer at the rate for which it was designed.
- Never operate the appliance at high transport speeds on slippery surfaces. Use care when reversing.
- Never direct discharge at bystanders or allow anyone in front of the appliance.
- Disengage power to the collector/impeller when the appliance is transported or not in use.

- Use only attachments and accessories approved by the manufacturer of the appliance (such as wheel weights, counterweights, or cabs).
- Never operate the appliance without good visibility or light. Always be sure of your footing, and keep a firm hold on the handles.
- Walk, never run.
- Clearing a Clogged Discharge Chute.
- Hand contact with the rotating impeller inside the discharge chute is the most common cause of injury associated with appliances. Never use your hand to clean out the discharge chute. To clear the chute:
 1. SHUT THE ENGINE (Motor) OFF!
 2. Wait 10 seconds to be sure the impeller blades have stopped rotating.
 3. Always use a clean-out tool, not your hands.
- If the appliance strikes a foreign object follow these steps:
 1. Stop the appliance. Release the switch.
 2. Remove the battery pack.
 3. Inspect for damage.
 4. Repair any damage before restarting and operating the appliance.

2.4 MAINTENANCE

- Check shear bolts; engine-mounted bolt, etc., at frequent intervals for proper tightness to be sure the appliance is in safe working condition.
- Always refer to owner's guide instructions for important details if the appliance is to be stored for an extended period.
- Store Idle appliances Indoors – When not in use, the appliances should be stored indoors in a dry, locked-up place – out of reach of children.
- Check shear bolts and other bolts at frequent intervals for proper tightness to be sure the equipment is in safe working condition.
- Run the appliance a few minutes after throwing snow to prevent freeze-up of the collector/impeller.
- Do not use a battery pack or appliance that is damaged or modified. Damaged or modified batteries may exhibit unpredictable behavior resulting in fire, explosion or risk of injury.
- Do not expose a battery pack or appliance to fire or excessive temperature space. Exposure to fire or temperature above 265°F (130°C) may cause explosion.
- Follow all charging instructions and do not charge the battery pack or appliance outside of the temperature range specified in the instructions. Charging improperly or at temperatures outside of the specified range may damage the battery and increase the risk of fire.
- Recharge only with the charger specified by the manufacturer. A charger that is suitable for one type

of battery pack may create a risk of fire when used with another battery pack.




- Use appliances only with specifically designated battery packs. Use of any other battery packs may create a risk of injury and fire.
- Have servicing performed by a qualified repair person using only identical replacement parts. This will ensure that the safety of the product is maintained.
- Do not modify or attempt to repair the appliance or the battery pack (as applicable) except as indicated in the instructions for use and care.
- Maintain appliance with care - follow instructions for changing accessories.
- Maintain or replace safety and instructions labels, as necessary.








2.5 RECOMMENDED AMBIENT TEMPERATURE RANGE:

Item	Temperature
Snow Thrower storage temperature range	1.4 °F (-17 °C) ~ 113 °F (45 °C)
Snow Thrower operation temperature range	1.4 °F (-17 °C) ~ 113 °F (45 °C)
Battery charging temperature range	32 °F (0 °C) ~ 113 °F (45 °C)
Charger operation temperature range	32 °F (0 °C) ~ 113 °F (45 °C)
Battery discharging temperature range	1.4 °F (-17 °C) ~ 113 °F (45 °C)
Battery storage temperature range	32 °F (0 °C) ~ 113 °F (45 °C)

3 SYMBOLS ON THE PRODUCT




Some of the following symbols may be used on this tool. Please study them and learn their meaning. Proper interpretation of these symbols will allow you to operate the tool better and safer.

Symbol	Explanation
	Direct current
	Precautions that involve your safety.
	Read and understand all instructions before operating the product, and follow all warnings and safety instructions.

Symbol	Explanation
	Wear eye protection.
	Thrown objects can ricochet and result in personal injury or property damage. Wear protective clothing and boots.
	Keep bystanders a safe distance from the machine.
	Keep hands away from the discharge area.
	Stay away from moving parts. Keep all guards and shields in place.
	Keep feet out of impeller. Keep feet away from rotating impeller.
	Stop the motor and remove the battery before leaving the product.

4 RISK LEVELS

The following signal words and meanings are intended to explain the levels of risk associated with this product.

SYMBOL	SIGNAL	MEANING
	DANGER	Indicates an imminently hazardous situation, which, if not avoided, will result in death or serious injury.
	WARNING	Indicates a potentially hazardous situation, which, if not avoided, could result in death or serious injury.
	CAUTION	Indicates a potentially hazardous situation, which, if not avoided, may result in minor or moderate injury.
	CAUTION	(Without Safety Alert Symbol) Indicates a situation that may result in property damage.

5 ENVIRONMENTALLY SAFE BATTERY DISPOSAL



The toxic and corrosive materials below are in the batteries used in this machine: **Lithium-Ion, a toxic material.**

▲ WARNING

Discard all toxic materials in a specified manner to prevent contamination of the environment. Before discarding damaged or worn out Li-ion battery, contact your local waste disposal agency, or the local Environmental Protection Agency for information and specific instructions. Take the batteries to a local recycling and/or disposal center, certified for lithium-ion disposal.

▲ WARNING

If the battery pack cracks or breaks, with or without leaks, do not recharge it and do not use. Discard it and replace with a new battery pack. **DO NOT TRY TO REPAIR IT!** To prevent injury and risk of fire, explosion, or electric shock, and to avoid damage to the environment:

- Cover the terminals of the battery with heavy-duty adhesive tape.
- **DO NOT** try to remove or destroy any of the battery pack components.
- **DO NOT** try to open the battery pack.
- If a leak develops, the released electrolytes are corrosive and toxic. **DO NOT** get the solution in the eyes or on skin, and do not swallow it.
- **DO NOT** put these batteries in your regular household trash.
- **DO NOT** incinerate.
- **DO NOT** put them where they will become part of any waste landfill or municipal solid waste stream.
- Take them to a certified recycling or disposal center.

6 PROPOSITION 65

▲ WARNING

This product contains a chemical known to the state of California to cause cancer, birth defects or other reproductive harm. Some dust created by power sanding, sawing, grinding, drilling, and other construction activities contains chemicals known to cause cancer, birth defects or other reproductive harm. Some examples of these chemicals are:

- Lead from lead-based paints;
- Crystalline silica from bricks and cement and other masonry products;
- Arsenic and chromium from chemically treated lumber.

Your risk of exposure to these chemicals varies depending on how often you do this type of work. To reduce your exposure to these chemicals, work in a well-ventilated area, and work with approved safety equipment, such as dust masks that are specially designed to filter out microscopic particles.

Save these instructions.

7 INSTALLATION

▲ WARNING

Do not change or make accessories that are not recommended by the manufacturer.

▲ WARNING

Do not connect to power supply until you assemble all the parts.

7.1 UNPACK THE MACHINE

▲ WARNING

Make sure that you correctly assemble the machine before use.


▲ WARNING

- If parts of the machine are damaged, do not use the machine.
- If you do not have all the parts, do not operate the machine.
- If parts are damaged or missing, contact the service center.

1. Open the package.
2. Read the documentation provided in the box.
3. Remove all the unassembled parts from the box.


- Remove the machine from the box.
- Discard the box and packing material in compliance with local regulations.

7.2 UNFOLD THE MIDDLE HANDLE




- Open the quick-release levers (15) on the two sides of the middle handle (3).
- Unfold the middle handle (3) until they come to a stop.
- Close the quick-release levers (15).
- Tighten the knobs (14) to hold the middle handle (3) in position.

7.3 INSTALL THE UPPER HANDLE




- Align the holes in the middle handle (3) and the upper handle (2).
- Put the bolts (12) through the holes.
- Tighten the handle knobs (14) onto the bolts (12).
- Do the same operation on the other side.

7.4 INSTALL THE CHUTE-ROTATION BOX




- Align the holes in the panel of the chute-rotation box (18) and the switch box (17).
- Put the chute-rotation box screws (21) through the holes.
- Tighten the chute-rotation box screw nuts with a wrench (not included).

7.5 INSTALL THE CHUTE DEFLECTOR



- Align the grooves (19) of the discharge chute with the slot (20) on the chute housing.
- Push the discharge chute (9) into position.
- Tighten the discharge chute screws (21) with a Phillips head screw driver to lock the discharge chute.

7.6 INSTALL THE BATTERY PACK**⚠ WARNING**

- If the battery pack or charger is damaged, replace the battery pack or the charger.
- Stop the machine and wait until the engine stops before you install or remove the battery pack.
- Read, know, and follow the instructions in the battery and charger manual.

1. Open the battery door (6).
2. Align the ribs on the battery pack (22) with the grooves in the battery compartment.
3. Push the battery pack (22) into the battery compartment until the battery pack (22) locks into place.
4. When you hear a click, the battery pack (22) is installed.
5. Close the battery door (6).

7.7 REMOVE THE BATTERY PACK

1. Open the battery door (6).
2. Push and hold the battery release button (23).
3. Remove the battery pack (22) from the machine.

8 OPERATION**⚠ WARNING**

Wear eye protection during operation.

8.1 COLD WEATHER OPERATION

The safe battery operation temperature ranges from 1°F (-17°C) to 113°F (45°C).


⚠ WARNING

Do not store or charge battery outside.

Battery must be charged and stored indoors prior to use of the machine.

If the machine does not start:


- remove the battery pack from the machine,
- charge the battery pack to 15 minutes in warm area, or when the charging light turns green.
- Install the battery pack back in the unit.

8.2 BLUE LED LIGHT

1. LED light flashes blue if the battery voltage is low. Place the battery in a room temperature area and charge until the green charger light is flashing green.
2. Blue LED Light (32) is always on if the battery temperature is low. Bring the Battery and Charger in to a warm area. Place the Battery in the charger and allow for the battery to reach room temperature or when the light on the charger is flashing Green. Once charger is flashing green, take the battery and place it in the unit to begin work.

BLUE LED INDICATOR

Low battery voltage	Flashing Blue Light
Low battery temperature	Solid blue light

8.3 START THE MACHINE

1. While holding the safety switch button (24), pull the bail lever (1) to start the machine.

i NOTE


Lower the scraper to the ground to remove the snow.

⚠ WARNING

Keep bystanders a safe distance from the machine.

⚠ WARNING


Examine the work area. Remove all stones, sticks, wire, bones, and other debris that can ricochet because of the rotating impeller.

8.4 STOP THE MACHINE


1. Release the bail lever (1) to stop the machine.

⚠ WARNING


Wait until the impeller fully stops before you start the machine again. Do not quickly turn the machine off and on.

8.5 LED LIGHT

1. To turn on the LED light (33) for night time snow removal, press the light switch (25).
2. To turn off the LED lights (33), press the light switch (25) again.


8.6 SPEED SWITCH

1. Press the speed switch (26) towards the rabbit symbol for higher impeller speed and discharge distance in heavy conditions.
2. Press the speed switch (26) towards the turtle symbol to decrease the impeller speed for greater runtime in light conditions.

8.7 ADJUST THE DISCHARGE CHUTE

You can adjust the discharge chute 180° to change the snow direction.

1. Push the chute-rotation handle (11) forward to move the discharge chute (9) to the left.
2. Push the chute-rotation handle (11) rearward to move the discharge chute (9) to the right.

8.8 ADJUST THE CHUTE DEFLECTOR

You can adjust the chute deflector up and down to change the throwing distance of the snow.

⚠ WARNING

Release the bail switch before you adjust the chute deflector.

⚠ WARNING

Do not push the deflector so far forward that a gap shows between the deflector and the chute.

1. Push and hold the trigger (27) on the chute deflector (10).
2. Move the chute deflector (10) up to increase the snow distance.
3. Move the chute deflector (10) down to decrease the snow distance.

8.9 OPERATION TIPS

- If it is possible, clear the snow with the direction of the wind.
- In strong winds, lower the chute deflector to direct the snow to the ground.
- When you complete the work, let the machine operate for a while to prevent ice formation in the discharge chute.
- If the snow is deeper than 8", decrease the speed and let the machine work at its own rhythm.
- Do not use the scraper to remove compact snow and ice.

9 MAINTENANCE

⚠ WARNING

Remove the battery pack from the machine before maintenance.

⚠ CAUTION

Use only approved replacement parts.

⚠ CAUTION

Do not let brake fluids, gasoline, petroleum-based materials touch the plastic parts. Chemicals can cause damage to the plastic, and make the plastic unserviceable.


⚠ CAUTION

Do not use strong solvents or detergents on the plastic housing or components.

9.1 GENERAL MAINTENANCE

- Before each use, examine the machine for damaged, missing, or loose parts such as screws, nuts, bolts and caps.
- Tighten all the fasteners and caps correctly.
- Clean the remaining snow on the machine with a brush.

9.2 REPLACE THE SCRAPER



⚠ WARNING

Use only approved replacement scrapers.

⚠ WARNING


Wear heavy gloves around the blade when you touch the blade.

⚠ WARNING

The scraper is located at the bottom of the impeller housing. Ensure that the battery is not installed in the tool.

1. Turn the machine to its side.
2. Remove the 5 bolts (21) below the deck that attach the scraper (7) to the machine.
3. Remove the worn scraper (7) from the machine.
4. Install the new scraper (7).
5. Install and tighten the bolts (21) that you removed.

9.3 REPLACE THE BELT




⚠ WARNING

Make sure to turn off the bail lever and remove the battery pack(s) before performing any maintenance task on your snow thrower.

1. Remove the screws (21) on the side wear pad (28).
2. Turn the large pulley (29) counterclockwise while you remove the remaining belt (30).
3. Turn the new belt (30) onto the pulleys (29).
4. Install and tighten the screws (21) that you removed.

9.4 REPLACE THE IMPELLER




⚠ WARNING

Make sure to turn off the bail lever and remove the battery pack(s) before performing any maintenance task on your snow thrower.

1. Remove the 4 sets of nuts and bolts on the middle steel plate.
2. Remove the 4 sets of nuts and bolts on each side.

3. Remove the impellers (8).
4. Install the new impellers (8).
5. Tighten the 8 sets of nuts and bolts that you removed.

9.5 REPLACE THE SKID PLATES



i NOTE

The range of adjustable height for skid plates is 1.5mm, when putting the bolts through the U-hole on the skid plates.

1. Loosen the 2 sets of bolts (12), spacers (13) and nuts (16) that attach the skid plates (31) to the snow thrower housing.
2. Remove the skid plates (31).
3. Install the new skid plates (31).
4. Do the same operation on the other side.

9.6 STORE THE MACHINE

- Clean the machine before storage.
- Make sure the motor is not hot when you store the machine.
- Make sure that the machine does not have loose or damaged parts. If it is necessary, do these steps/instructions:
 - Replace the damaged parts.
 - Tighten the bolts.
 - Speak to a person at an approved service center.
- Store the machine in a dry area.
- Make sure that children cannot come near the machine.


10 TROUBLESHOOTING

Problem	Possible cause	Solution
The handle is not in position.	The bolts are not engaged correctly.	Adjust the height of the handle and make sure that the knobs and bolts are aligned correctly.
The machine does not start.	The battery is not charged.	Charge the battery by following the procedures in the battery and charger manual.
	The switch is defective.	Have the switch replaced by an authorized service center.
	Battery is too cold.	Remove battery from snow thrower. Place battery on charger and allow to charge for 10 minutes or until the changing light turns green. Remove from charger and install in snow thrower for use.
	Blue LED light is Flashing - Battery is in Low Voltage Protection.	Bring the Battery and Charger in to a warm area. Place the Battery in the charger and allow for the battery to reach room temperature or when the light on the charger is flashing Green. Once charger is flashing green, take the battery and place it in the unit to begin work.
Blue LED light is always on - Battery Temperature is Low.	Bring the Battery and Charger in to a warm area. Place the Battery in the charger and allow for the battery to reach room temperature or when the light on the charger is flashing Green. Once charger is flashing green, take the battery and place it in the unit to begin work.	

Problem	Possible cause	Solution
The engine is on, but the impeller does not turn.	The belt is damaged.	Replace the belt.
A thin layer of snow stays behind.	The scraper is damaged.	Replace the scraper.

* If you cannot find the solution to these problems, call 1-855-345-3934.

11 TECHNICAL DATA

Voltage	60 V
No load speed	1900 RPM
Clearing width	22 in (55.9 cm)
Clearing depth	13 in (33.0 cm)
Impeller size	18 in (45.7 cm)
Weight (without battery pack)	26.1 kg (57.5 lbs)
Battery	2908502CT and other BAB series
Charger	CAC801 and other CAC series
Double-insulated construction	

12 LIMITED WARRANTY



Greenworks hereby warrants this product, to the original purchaser with proof of purchase, for a period of four (4) years against defects in materials, parts or workmanship. Greenworks, at its own discretion will repair or replace any and all parts found to be defective, through normal use, free of charge to the customer. This warranty is valid only for units which have been used for personal use that have not been hired or rented for industrial/commercial use, and that have been maintained in accordance with the

instructions in the owners' manual supplied with the product from new.

ITEMS NOT COVERED BY WARRANTY:

1. Any part that has become inoperative due to misuse, commercial use, abuse, neglect, accident, improper maintenance, or alteration; or
2. The unit, if it has not been operated and/or maintained in accordance with the owner's manual; or
3. Normal wear;
4. Routine maintenance items such as lubricants, blade sharpening;
5. Normal deterioration of the exterior finish due to use or exposure.

HELPLINE:

Warranty service is available by calling our toll-free helpline, at 1-855-345-3934.

TRANSPORTATION CHARGES:

Transportation charges for the movement of any power equipment unit or attachment are the responsibility of the purchaser. It is the purchaser's responsibility to pay transportation charges for any part submitted for replacement under this warranty unless such return is requested in writing by Greenworks.

USA address:

Greenworks Tools

P.O. Box 1238

Mooresville, NC 28115


Canadian address:

Greenworks Tools Canada
Inc.

P.O. Box 93095, Newmarket,
Ontario

L3Y 8K3

13 EXPLODED VIEW

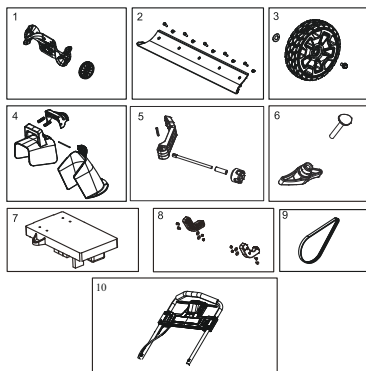

No.	Part No.	Qty	Description
1	R0201719-00	1	Impeller assembly
2	R0200650-00	1	Scraper Kit
3	R0200662-00	1	Wheel Assembly
4	R0200651-00	1	Chute Deflector Assembly
5	R0201839-00	1	Quick-Release Lever Assembly
6	R0201852-00	1	Cam Lock assembly
7	R0205865-00	1	PCB board
8	R0200655-00	1	Skid plates
9	R0200288-00	1	Belt
10	R0201854-00	1	Upper handle assembly